

Bluetooth Mesh under the Microscope: How much ICN is Inside?

Hauke Petersen, Peter Kietzmann, Cenk Gündoğan,
Thomas C. Schmidt and Matthias Wählisch

peter.kietzmann@haw-hamburg.de

6th ACM Conference on Information-Centric Networking (ICN 2019)

September 26, 2019

Starting Point

The Bluetooth mesh standard adopted last year is a wireless technology based on the ICN principles. [...] It implements all of the major paradigms of information-centric networking in order to enable simplicity, scalability and reliability [...]. — SILVAIR. [Information-centric networking – a revolutionary approach to wireless lighting control](#), 2018.

<http://silvair.com/resources/information-centric-networking/>

Starting Point

The Bluetooth mesh standard adopted last year is a wireless technology based on the ICN principles. [...] It implements all of the major paradigms of information-centric networking in order to enable simplicity, scalability and reliability [...]. — SILVAIR. [Information-centric networking – a revolutionary approach to wireless lighting control](#), 2018.

<http://silvair.com/resources/information-centric-networking/>

What is BT mesh? **How** does it compare to ICN?

Related Work

		BT mesh	ICN
[SILVAIR'18]	BT mesh standard based on ICN principles No technical detail	✓	✓
[ICN'18]	NDNoT Framework for IoT No technical evaluation	✗	✓
[SenSys'17]	BLE and BT mesh performance analysis No ICN at all	✓	✗
[SoftCOM'15]	Service mediation in multi-hop BLE/NDN No comparison in ICN	✗	✓
[Theses'14]	Bluetooth convergence layer for NetInf No low-power BT	✗	✓

Outline

Motivation why we started this work

BT mesh overview and comparison to ICN principles

Experimental evaluation in the FIT IoT-LAB testbed

Outlook how ICN can benefit from BT mesh concepts

BT mesh overview and comparison to ICN principles

Bluetooth (BT) Evolution

- ▶ BT (since 1.0) → BLE (since 4.0) → **BT mesh** (independent) & BT 5.0++




Bluetooth (BT) Evolution

▶ BT (since 1.0) → BLE (since 4.0) → **BT mesh** (independent) & BT 5.0++



- ▶ Uses BLE hardware
- ▶ Enables multi-hop
- ▶ Adds many-to-one
Adds many-to-many


Stack Organization

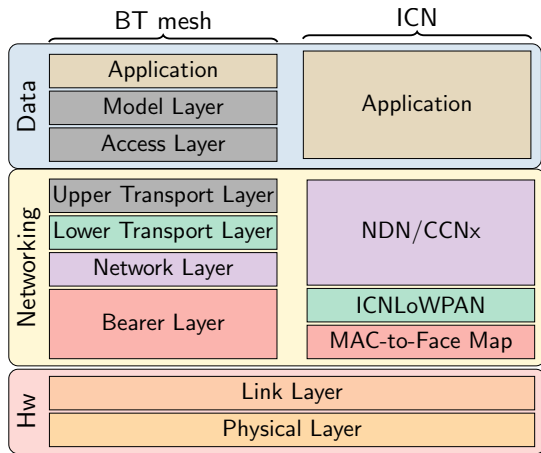

BT mesh

- ▶ Full vertical stack
- ▶ Data model per device type
- ▶ Publish-subscribe data exchange
- ▶ Segmentation on transport layer
- ▶ Tied to single interface BLE radio

Stack Organization

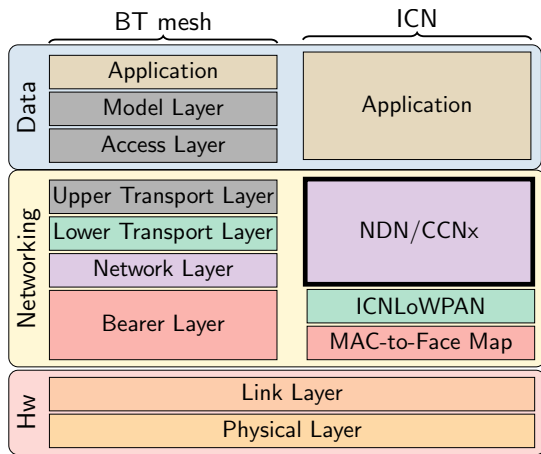

BT mesh

- ▶ Full vertical stack
- ▶ Data model per device type
- ▶ Publish-subscribe data exchange
- ▶ Segmentation on transport layer
- ▶ Tied to single interface BLE radio

ICN

- ▶ Relies on supporting protocols
- ▶ No requirement on format of names
- ▶ Convergence layer implements compression and segmentation
- ▶ Allows multi-interface of different types

MAC and Reliability

BT mesh


- ▶ TX on 3 broadcast channels
- ▶ Replicate packets up to 7x a priori
 - Multiple transmissions / packet
 - Tweaked according to roles
- ▶ RX scans on 3 channels consecutively



Routing and Forwarding

BT mesh

- ▶ Multi-hop & multi-path by forwarding all packets over broadcast
- ▶ *Managed flooding*:
 - ▶ Hop-limit counter
 - ▶ Message cache list known packets
 - ▶ Prevents redundant forwarding
 - ▶ Does **not** cache content
- ▶ Native support of group requests

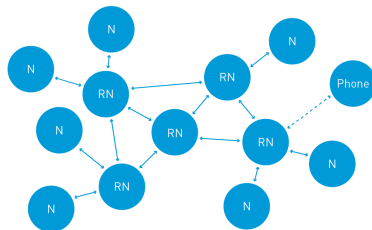

Names and Addresses

BT mesh

- ▶ Group addresses to label data streams
 - ▶ Unassigned
 - ▶ Unicast
 - ▶ Group: map to fixed roles
(*all relays, all nodes, ...*)
 - ▶ Virtual: configurable groups
 - ▶ Setup usually static during deployment
 - ▶ Data is addressed not endpoint
- **Content centric**

Publish-Subscribe

BT mesh

- ▶ Publish-subscribe w/o broker
- ▶ Enabled by broadcasting on link layer
- ▶ Advertise items to groups (**publish**)
- ▶ Filter items on receive (**subscribe**)
- ▶ Publish **can** be solicited for reliability
→ similar to ICN request/response


(Standard advises against)

BT mesh vs ICN Comparison


	BT mesh	ICN
MAC	Broadcast	Unspecified
Reliability	Replication	Retransmits on demand
Routing	No routing	FIB based routing
Forwarding	Managed flooding	FIB & PIT based forwarding
Names	Group addresses for data streams	Hierarchical tokenized names for data items
Addresses	Numeric representation	Semantic representation
Publish-Subscribe	Enabled without broker	Workarounds needed to avoid <i>push</i>

Experimental evaluation in the FIT IoT-LAB testbed

- ▶ ARM Cortex-M4F @ 64 MHz
- ▶ 64 kB RAM, 512 kB ROM
- ▶ BLE radio on SoC (1 Mbps)
- ▶ RIOT 2019.04 + NimBLE



- ▶ ARM Cortex-M3 @ 72 MHz
- ▶ 64 kB RAM, 512 kB ROM
- ▶ IEEE 802.15.4 radio (250 kbps)
- ▶ RIOT 2019.04 + CCN-lite




RIOT

CCN-lite

Single-hop Topology w/ 10 Nodes


Many-to-one

9 publishers; 100 items/node; 5 s interval

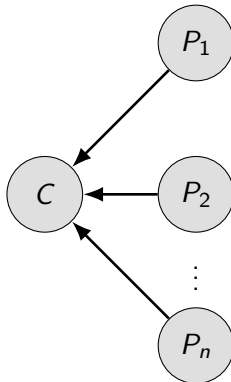

One-to-many

1 publisher; 100 items; 1 s interval

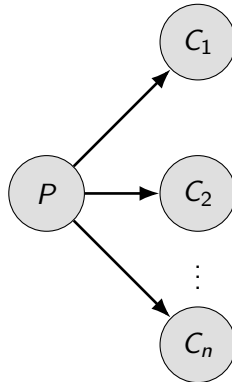


→ Data flow
 n : 9 nodes
 C : Consumer
 P : Producer

Multi-hop Line Topology w/ 10 Nodes

Many-to-one

9 publishers; 100 items/node; 5 s interval



→ Data flow


n : 9 nodes

C : Consumer

P : Producer


One-to-many

1 publisher; 100 items; 1 s interval




Time to Content Arrival

Single-hop

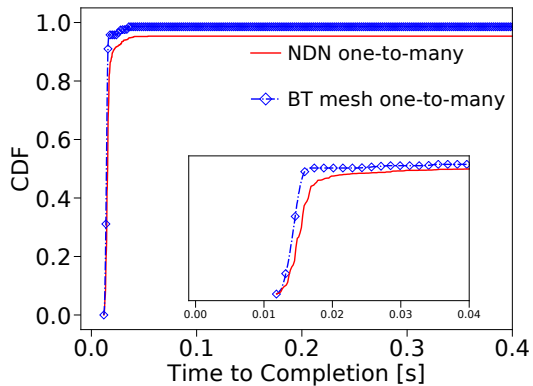


Time to Content Arrival

Single-hop

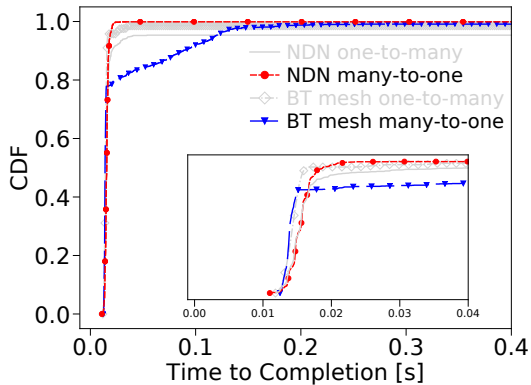


Time to Content Arrival

Single-hop

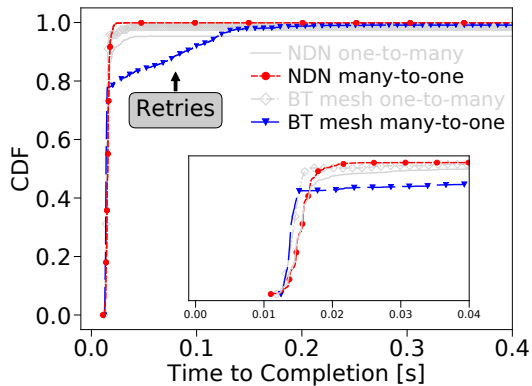


Time to Content Arrival

Single-hop

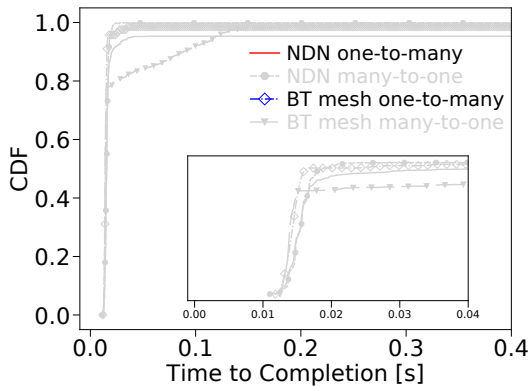


Multi-hop

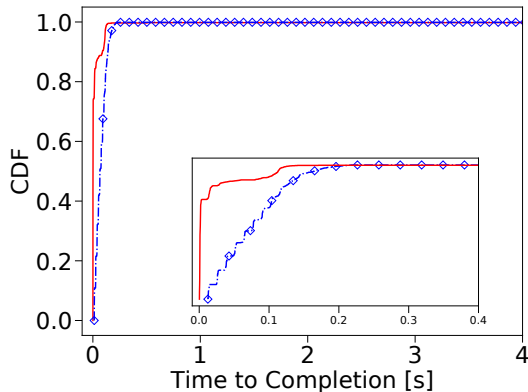


Time to Content Arrival

Single-hop

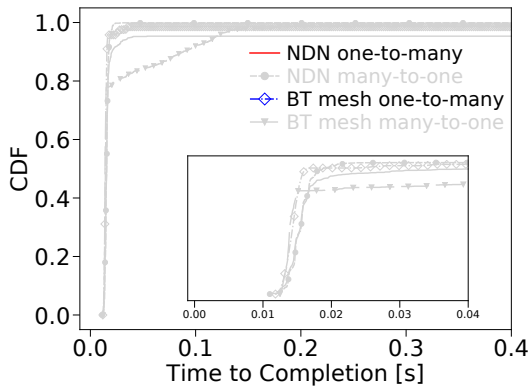


Multi-hop

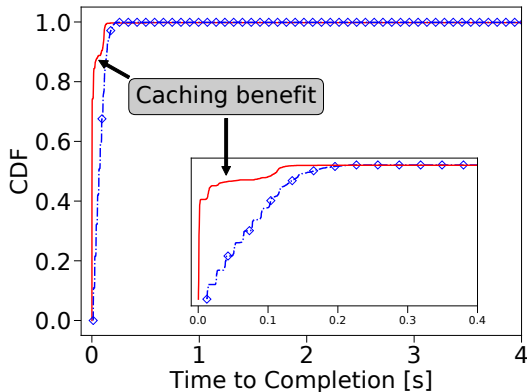


Time to Content Arrival

Single-hop

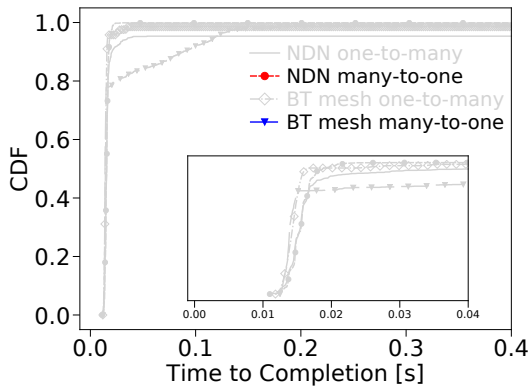


Multi-hop

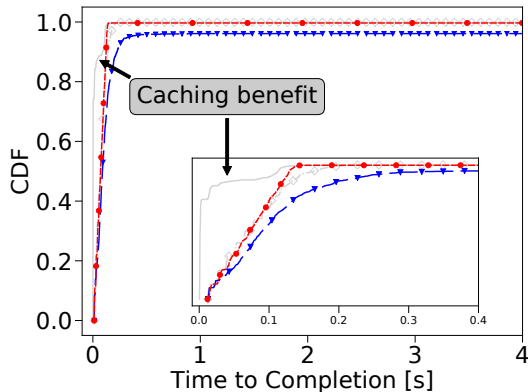


Traffic Load: One-to-Many

Single-hop

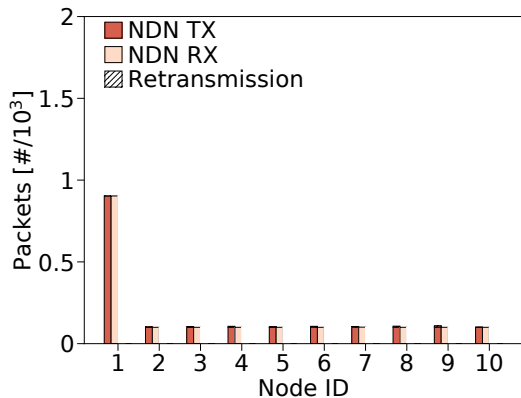


Traffic Load: One-to-Many

Single-hop

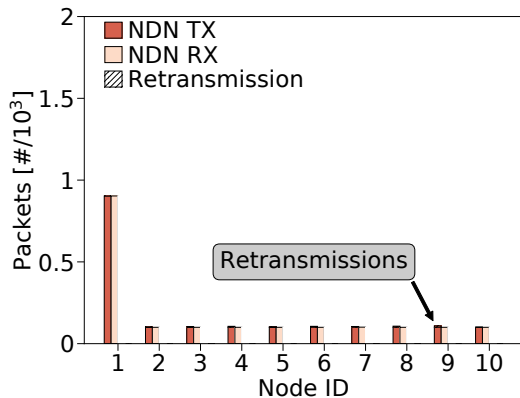


Traffic Load: One-to-Many

Single-hop

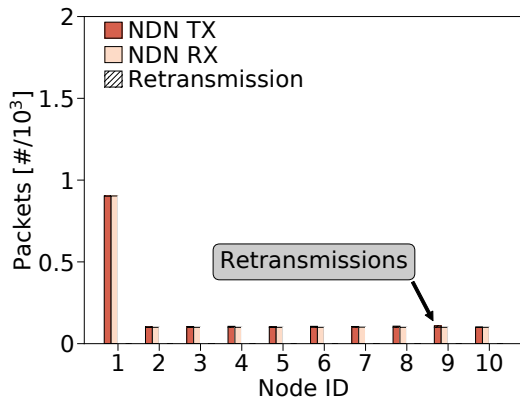


Multi-hop

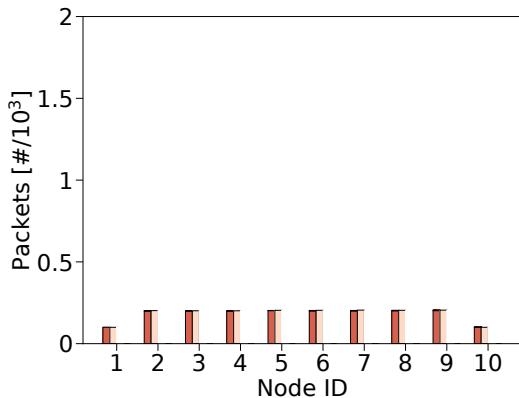


Traffic Load: One-to-Many

Single-hop

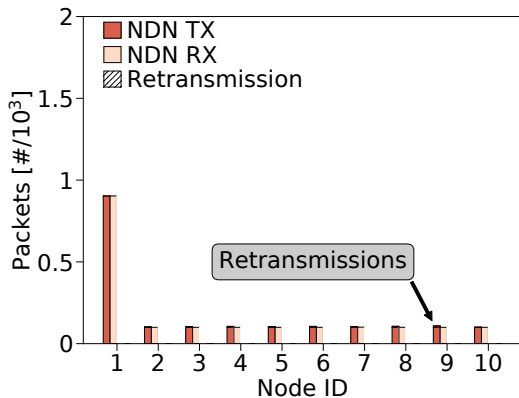


Multi-hop

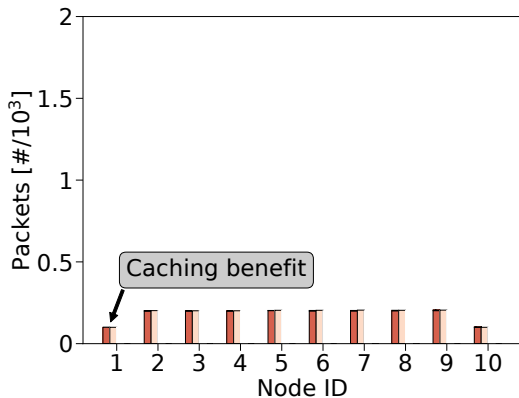


Traffic Load: One-to-Many

Single-hop

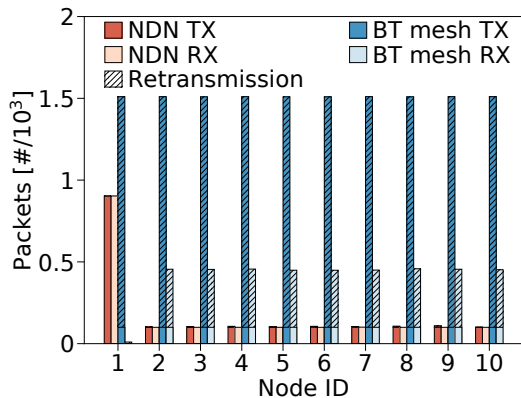


Multi-hop

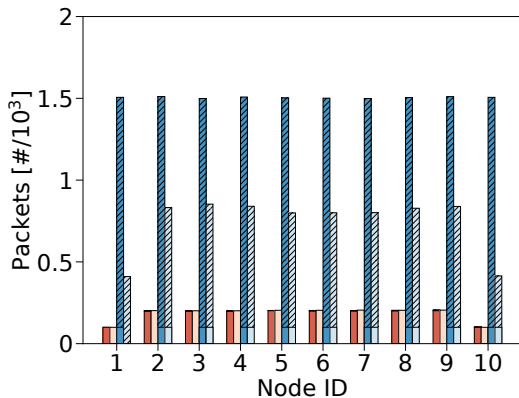


Traffic Load: One-to-Many

Single-hop

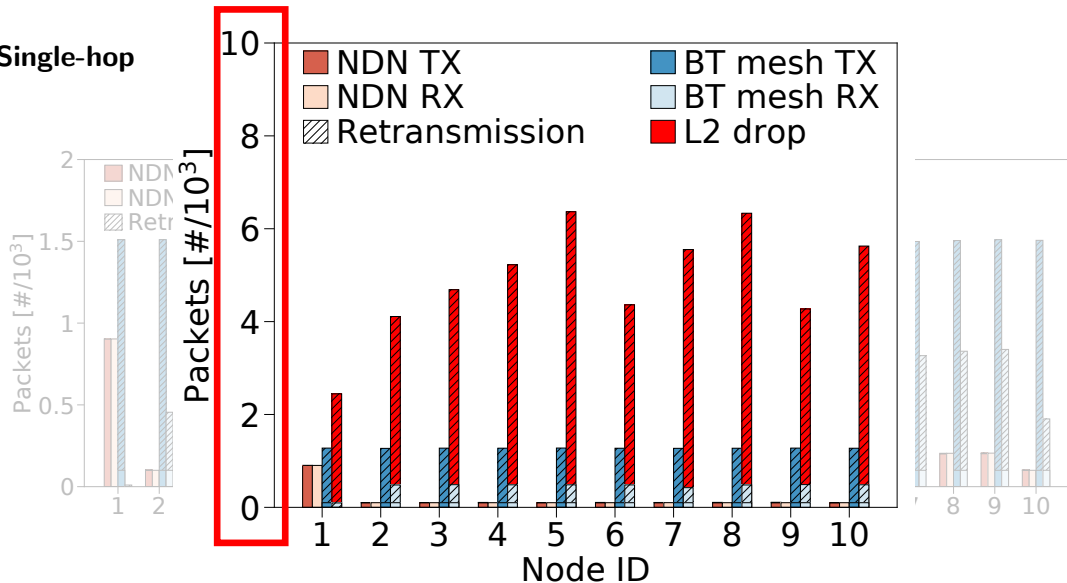


Traffic Load: One-to-Many

Single-hop

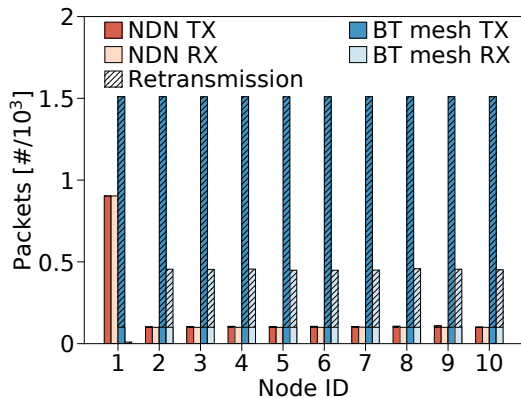

Multi-hop

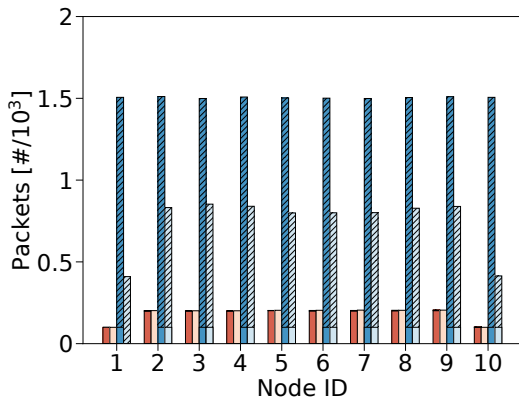

Redundant replications in BT mesh flood the medium with packets


Outlook how ICN can benefit from BT mesh concepts

Low-power Friendship Feature in BT mesh

- ▶ Integrate battery driven nodes by coupling low-power and friend node
- ▶ Friend allocates **one** queue for **one** low-power node holds messages
- ▶ Low-power node sleeps and notifies friend on wakeup
- ▶ Friend delivers messages and **drops** them



○ Active Node

...▶ Establish

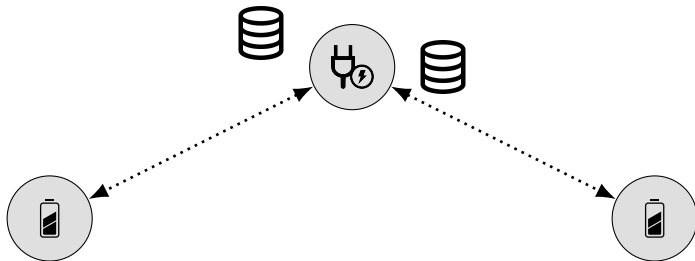



Low-power Friendship Feature in BT mesh

- ▶ Integrate battery driven nodes by coupling low-power and friend node
- ▶ Friend allocates **one** queue for **one** low-power node holds messages
- ▶ Low-power node sleeps and notifies friend on wakeup
- ▶ Friend delivers messages and **drops** them

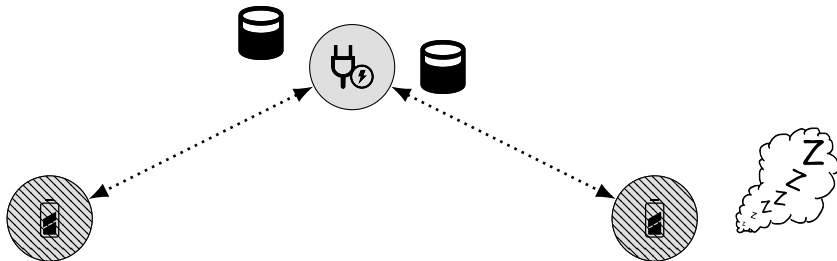



Low-power Friendship Feature in BT mesh

- ▶ Integrate battery driven nodes by coupling low-power and friend node
- ▶ Friend allocates **one** queue for **one** low-power node holds messages
- ▶ Low-power node sleeps and notifies friend on wakeup
- ▶ Friend delivers messages and **drops** them

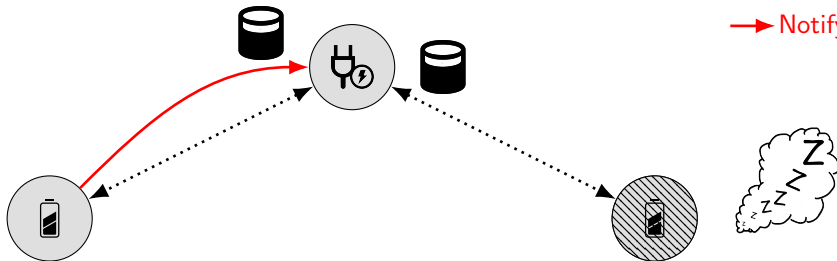

Low-power Friendship Feature in BT mesh


- ▶ Integrate battery driven nodes by coupling low-power and friend node
- ▶ Friend allocates **one** queue for **one** low-power node holds messages
- ▶ Low-power node sleeps and notifies friend on wakeup
- ▶ Friend delivers messages and **drops** them

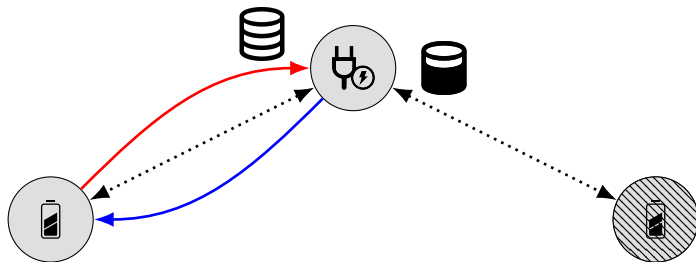

Use Friend as Deputy Cache in ICN

Friend requests low-power node

- ▶ Establish PIT state by *long-lived Interest*
- ▶ Low-power node answers on wake-up
- ▶ Alternatives: HoPP, Interest Notification, ...


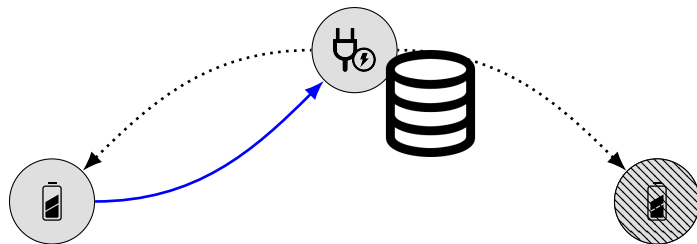


- Active Node
- ◌ Sleeping Node
- ...▶ Establish / Interest
- Deliver / Data

Use Friend as Deputy Cache in ICN

Low-power node requests friend

- ▶ Low-power simply sends Interest
- ▶ Sleep and retransmit request on next device wake-up

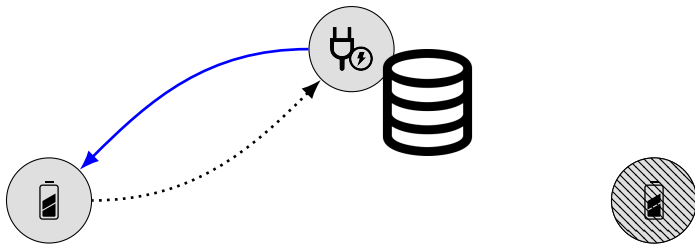

Conclusion

Comparative analysis if BT mesh is an ICN

Addressing has analogy but caching is missing

Experimental evaluation in different IoT deployments

Flooding and replication degrades network performance in BT mesh

Applicability for real-world installations

Full vertical BT mesh stack covers all aspects

Synergies by combining principles of BT mesh and ICN



Potential improvements by adopting low-power feature in ICN

BS 1: Testbed Deployment

Parameters


- ▶ 4 replications on each node
- ▶ 20 ms advertisement interval
- ▶ 3 advertisement channels
- ▶ 4 Interest retransmits at max.
- ▶ 1 s retry interval & 10 s Interest t/o
- ▶ L2 ARQ and CSMA/CA

... default parameters where possible!




BS 2: Traffic Load: Many-to-One

Single-hop

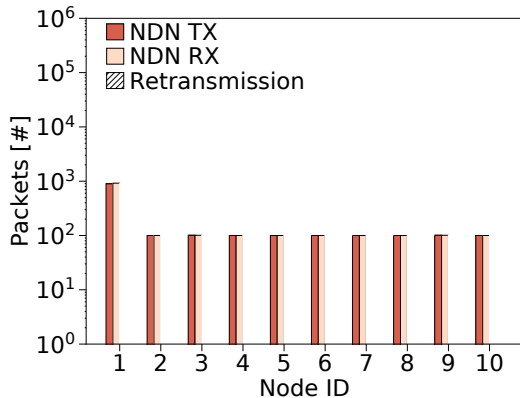


Multi-hop

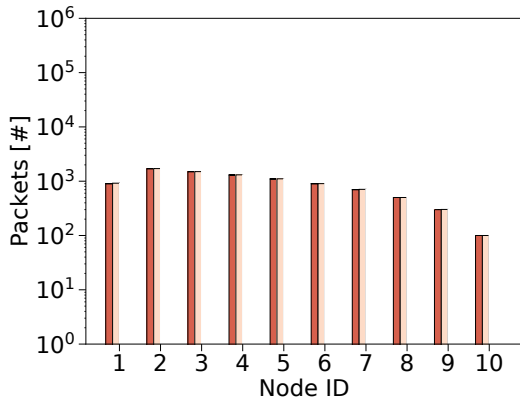

BS 2: Traffic Load: Many-to-One

Single-hop

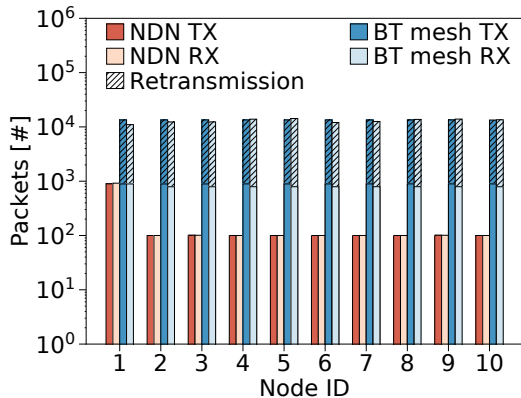

Multi-hop

